


Key Features


- ❖ Programmer for LED Controller ICs
- ❖ Standalone Flashing with onboard memory
- ❖ Easy Bus Functionality validation
- ❖ Parallelism – Program up to 4 devices
- ❖ Support multi communication protocols
- ❖ Customization with PC interface
- ❖ Easy plug and play with manufacturing line

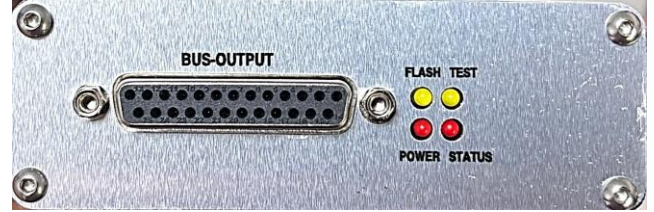

Technical Specifications

Description	Details
Input Voltage	DC 12V
LED Controls	16 Channel LED
Supporting Devices	522 – 49 / 59 / 88 / 94 / 95
Communication Interface	I2C, UART-CAN & CAN-FD
PC Interface	Micro USB
User Friendly GUI Screen	Flash & Bus Functionality
ESD	Up to 15 KV
Enclosure	Metallic
Dimension	110 x 85 x 30 mm
Operating Temperature	Ambient Temperature

GUI

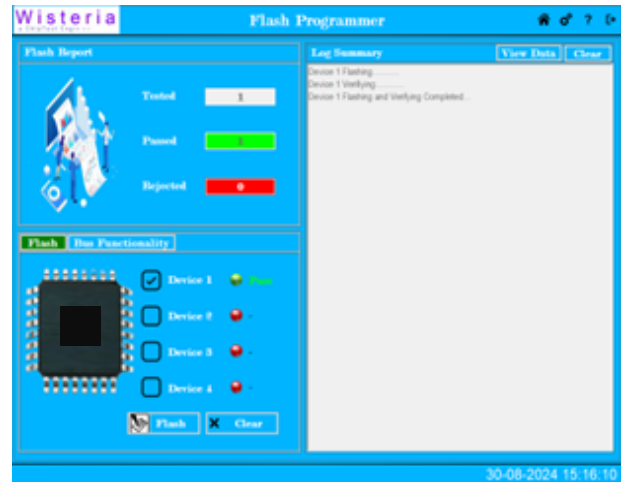

Solutions Driven By Knowledge